



SHERA SPLENDID PLANK APPLICATION

Available
Splendid Plank Size
150 mm X 3000 mm
220 mm X 3000 mm

Thickness
10 mm

Available Textures
Cassia & Smooth

Application
**Paneling, Landscaping,
Facade**

Profile

Yellow Flame




Yellow Flame

De Line Series



DL 02



DL 05




DX 12

Step 1: Frame Selection


Please select any one correct type of frame from options shown below . Please ensure to buy frames with proper required dimensions (like size of frame, thickness etc).



Galvanized Iron (GI)



Aluminium Section



Mild Steel (MS)


Step 2: Framing Details

Select the appropriate type of framing pattern depending upon the needs of the application.

Install frames with the help of concrete fastener and sheet metal screw at appropriate spacing as per SHERA standards and ensure the framing is intact to hold the plank.




For the detailed frame fixing procedure and specification, please refer to the SHERA Plank Installation Manual

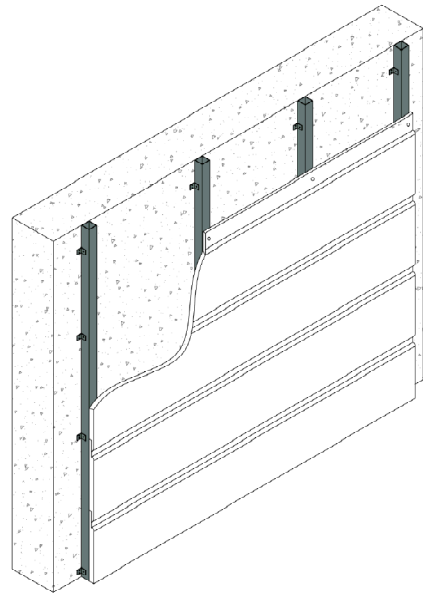

Step 3: SHERA Splendid Plank Fixing & Screw Detail



Concrete fastener
(for fixing the frame on the structure)

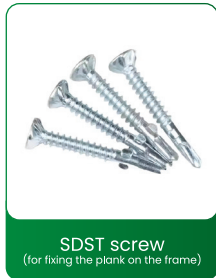


SDST screw
(for fixing the plank on the frame)

Please note:

- Screw spacing should be maintained as per SHERA Standards. Please refer picture.
- SHERA Screws must be countersunk by minimum 1 mm & maximum 2 mm.



For detailed screw fixing procedure please refer SHERA Plank Installation Manual

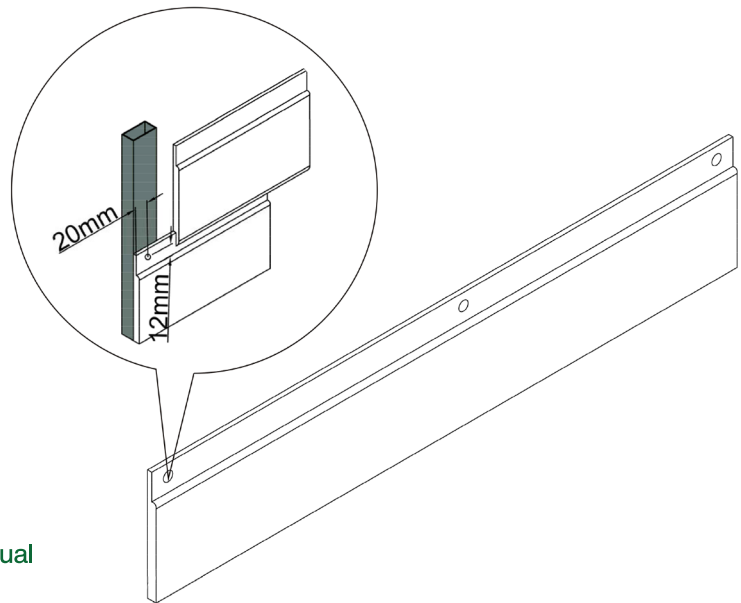

Step 4: Painting / Finishing Process

- Apply primer and paint as per desired finish.
- Water based clear PU coat can be applied to enhance paint finishes.



For detailed painting & finishing procedure, please refer SHERA Painting Manual



For further details, contact us below



shera.com



+91 80974 99099



india_sales@shera.com