



SHERA UNCOLORED PLANKS APPLICATION

Available
Uncolored Planks Size
150 mm X 3000 mm


Thickness
8 mm

Application
**Ceiling, Paneling,
Landscaping, Facade**

Plank Surface Finish



Teak



Straight Grain



Cassia




Antique Wood

Step 1: Frame Selection


Please select any one correct type of frame from the options shown below. Please ensure to buy frames with the proper required dimensions (like size of frame, thickness etc).



Galvanized Iron (GI)



Aluminium Section



Mild Steel (MS)


Step 2: Framing Details

Select the appropriate type of framing pattern depending on the needs of the application.





Install frames with the help of concrete fastener and sheet metal screw at appropriate spacing as per SHERA standards and ensure the framing is intact to hold the planks.



For detailed frame fixing procedure & specification, please refer to the SHERA Plank Installation Manual.

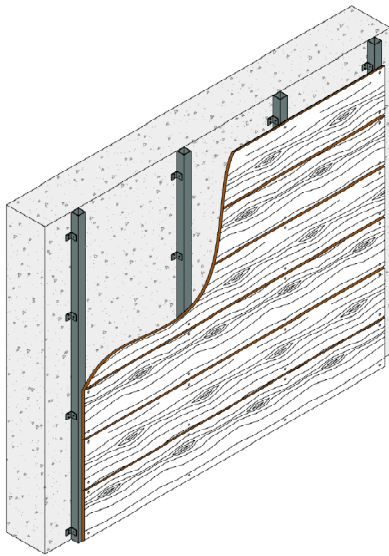


Step 3: SHERA Plank Fixing Patterns

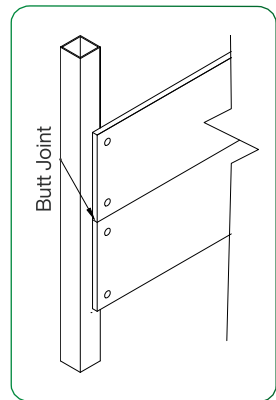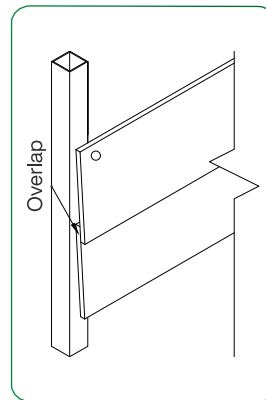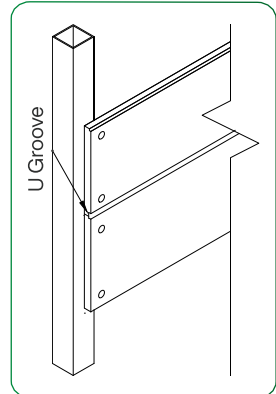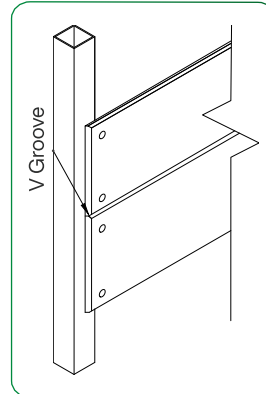


For detailed planks fixing and finishing procedure, please refer to the Plank Installation Manual.

Step 4: SHERA Plank Fixing & Screw Detail



Please note:

- Screw spacing should be maintained as per SHERA Standards. Please refer picture.
- SHERA Screws must be countersunk by minimum 1 mm & maximum 2 mm.

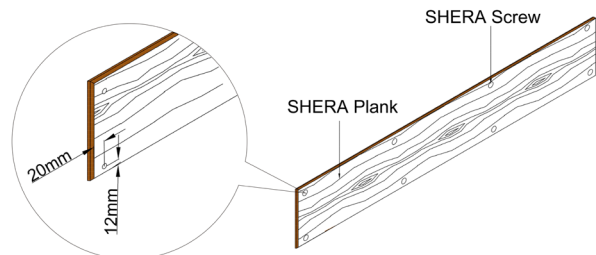

For detailed screw fixing procedure please refer SHERA Plank Installation Manual

Step 5: Painting / Finishing Process

- Cover the screw heads with acrylic putty and allow it to dry completely.
- Apply primer and paint as per desired finish.
- Water based clear PU coat can be applied to enhance paint finishes.



For painting & finishing procedures, please refer SHERA Painting Manual.



For further details, contact us below



shera.com



+91 80974 99099



india_sales@shera.com